



# Hillside Farm Supply

## Grain Equipment Product Catalogue

Email: [hillsidefarmsupply@outlook.com](mailto:hillsidefarmsupply@outlook.com)  
Phone: (204) 312-7833  
[hillsidefarmsupply.com](http://hillsidefarmsupply.com)

# Edge Agro/Neeralta Grain Augers

DYNAMICALLY BALANCED  
SUSPENDED FLIGHTING

DIESEL POWERED

DRAMATICALLY INCREASE  
AUGER CAPACITY & LIFESPAN

GRAINS • PULSES • FERTILIZER

AVAILABLE IN 12-42, 14-42  
10-42, 12-52, 14-52



Need a tough, reliable auger  
for your grain?

Neeralta transport augers are  
built stronger to last longer.

Available in 8' x 46' or 10' x 46'



# Neeralta Grain Baggers, Grain Bags and Extractors

## 1020

- - 10' diameter bags up to 500' long
- - 20" main auger
- - 30,000 bu/hr
- - Hydraulic lift for bag loading
- - 100 HP/540 PTO without swing auger
- - 125 HP/540 PTO with swing auger
- - Dual wheels
- - Heavy duty disc brakes
- - Heavy 1/4" flighting
- - Heavy tubing
- - Road lights
- - Bag loading tray
- - Direct PTO drive



## Grain Bag Specs

- 9' x 300' - 11,750 bu
- 10' x 250' - 11,250 bu
- 10' x 300' - 13,500 bu
- 10' x 400' - 18,500 bu
- 10' x 500' - 23,250 bu
- 12' x 500' - 32,000 bu

## 1024s



- 10' diameter bags up to 500' long
- 24" main auger
- 50,000 bu/hr
- Hydraulic lift for bag loading
- 125 HP/1000s PTO requirement
- Dual wheels
- Heavy duty disc brakes
- Heavy 7/16" flighting
- Heavy tubing
- Road lights
- Bag loading tray

## SPECS:

## Extractor

- Main auger diameter: 16"
- HP Required: 100
- Capacity: 12,000 Bu/Hr.
- Hydraulic Flow: 8 GPM at 2,200 PSI
- Max bag length: 500'
- Bag Diameter: 9'-12' (with extension kit)



# Kwik-Belt Conveyors

- **Larger Capacity, Non-Leaking Transition**
- **Controlled Vertical Discharge Flow**
- **Larger Heavy Duty PEER Bearings**
- **Heavier Duty Undercarriage**
- **Thicker Walled Tubing**
- **Wider Conveyor Belts**  
(50% higher capacity than similar sized tubes)



**Up to  
18,000 BPH**



# Kwik-Belt Conveyors

## Belt Conveyors

18, 22, 26 Series

### Features Include:

- 10" x 12 Ga tube w/ 18" 2ply chevron belt (10,000 Bu/hr)
- 12" x 12 Ga tube w/ 22" 2ply chevron belt (14,000 Bu/hr)
- 14" x 12 Ga tube w/ 26" 2ply chevron belt (18,000 Bu/hr)
- Weather guard standard
- A-frame undercarriage on 30' to 55'
- Hydraulic scissor lift on 65' to 125'
- Heavy Duty, Long Lasting, PEER Bearings  
1-1/2" (18 Series) 1-15/16" (22 Series) 2-3/16" (26 Series)
- Cable only trussing on 55' to 90'
- Steel trussing on 100' to 125'

### Options:

- Swing away models available in 65' to 125'
- Electric, Hydraulic, Gas or PTO drive
- Electric or Hydraulic Power Swing
- Self-propelled Mover Kit
- Hydraulic Winch Kit
- Fender & Light Kit
- Drive Clutch Kit

Up to  
**18,000 BPH**



## Transfer Conveyors

18, 22 Series

### Features Include:

- 35" x 77" Collapsible hopper
- 8" Hopper clearance at front of hopper when collapsed
- Adjustable discharge height from 28" to 56"
- 10" x 12 Ga tube w/ 18" 2ply chevron belt (10,000 Bu/hr)
- 12" x 12 Ga tube w/ 22" 2ply chevron belt (14,000 Bu/hr)

### Options:

- Electric, Hydraulic or Gas drive

Up to  
**14,000 BPH**



# Kwik-Belt Conveyors

## Field Loaders

**18, 22, 26 Series**

### Features Include:

- 10" x 12 Ga tube w/ 18" 2ply chevron belt (10,000 Bu/hr)
- 12" x 12 Ga tube w/ 22" 2ply chevron belt (14,000 Bu/hr)
- 14" x 12 Ga tube w/ 26" 2ply chevron belt (18,000 Bu/hr)
- Heavy Duty, Long Lasting, PEER Bearings
  - 1-1/2" (18 Series) 1-15/16" (22 Series) 2-3/16" (18 Series)
- 8" Hopper clearance at front of hopper when collapsed
- 35" x 77" Collapsible hopper
- Weather guard standard
- A-frame undercarriage

**Up to  
18,000 BPH**




### Stainless Steel Features Include:

- 10" x 12 Ga 304 Stainless Steel tube w/ 18" belt (250 Ton/hr)
- 12" x 12 Ga 304 Stainless Steel tube w/ 22" belt (350 Ton/hr)
- 14" x 12 Ga 304 Stainless Steel tube w/ 26" belt (450 Ton/hr)
- Heavy Duty, Long Lasting, PEER Stainless Steel Bearings
  - 2-Ply epoxy and powder coat painted frame
  - Stainless steel weather guards
  - Stainless steel roller shafts

### Options:

- Drive Clutch Kit
- Fender & Light Kit
- Hydraulic Winch Kit
- Self-propelled Mover Kit
- Electric, Hydraulic, Gas or PTO drive

**Lengths from  
37' to 48'**

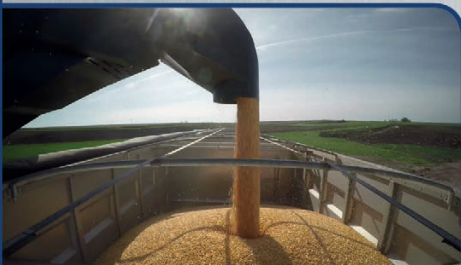

## Kwik-Pit

**26 Series**

### Features Include:

- 7-1/2" Hopper Clearance
- 36" x 114" Hydraulic collapsible hopper
- Hydraulic transport lift with safety pins
- 14" x 12 Ga tube w/
  - 26" 2ply chevron belt (18,000 Bu/hr)

### Options:

- Electric, Hydraulic or Gas drive
- Self-propelled Mover Kit
- Discharge Tube Extension Kits
- Hydraulic Wet Kit (for electric or gas drives)

**Up to  
18,000 BPH**

**Hydraulic  
Flaps**



# Kwik-Belt Conveyors

## FMD Field Loaders

## 18, 22 Series

### Features Include:

- All the same great features of the Field Loader
  - Joystick Steering and Drive Control
  - 37HP Kohler Hanging Gas Engine
    - Electric Start with Battery
    - Self-propelled Mover Kit
      - Hydraulic Winch
      - Electric Clutch

**Up to  
18,000 BPH**

### 18 Series Conveyors

| Model     | <sup>1</sup> Low Position |         | <sup>2</sup> High Position |         | Width   | Weight<br>(lbs) | HP Req. |      |     | HYD Req.<br>(GPM / PSI) |
|-----------|---------------------------|---------|----------------------------|---------|---------|-----------------|---------|------|-----|-------------------------|
|           | B                         | C       | A                          | C       |         |                 | PTO     | ELEC | GAS |                         |
| 1815 TR   | 4'-2"                     | 7'-2"   | 4'-8"                      | 7'-2"   | 3'-6"   | 1,025           | N/A     | 7.5  | 9.0 | 16 / 2500               |
| 1830 TD   | 11'-7"                    | 12'-5"  | 14'-7"                     | 11'-10" | 7'-8"   | 1,680           | N/A     | 10   | N/A | 16 / 2500               |
| 1835 TD   | 12'-10"                   | 14'-4"  | 16'-10"                    | 13'-3"  | 7'-8"   | 1,835           | N/A     | 10   | N/A | 16 / 2500               |
| 1838 TDFL | 11'-3"                    | 17'-5"  | 17'-2"                     | 15'-11" | 7'-8"   | 2,105           | N/A     | 12.5 | N/A | 16 / 2500               |
| 1840 TD   | 12'-5"                    | 16'-10" | 19'-7"                     | 14'-10" | 7'-8"   | 2,010           | N/A     | 12.5 | N/A | 16 / 2500               |
| 1843 TDFL | 11'-8"                    | 19'-3"  | 19'-9"                     | 17'-8"  | 7'-8"   | 2,250           | N/A     | 12.5 | N/A | 16 / 2500               |
| 1845 TD   | 12'-0"                    | 19'-0"  | 22'-1"                     | 17'-1"  | 7'-8"   | 2,175           | N/A     | 12.5 | N/A | 16 / 2500               |
| 1848 TDFL | 13'-0"                    | 21'-8"  | 22'-2"                     | 20'-5"  | 7'-8"   | 2,380           | N/A     | 12.5 | N/A | 16 / 2500               |
| 1850 TD   | 12'-10"                   | 20'-6"  | 24'-7"                     | 19'-2"  | 7'-8"   | 2,320           | N/A     | 12.5 | N/A | 16 / 2500               |
| 1835 SD   | 12'-8"                    | 15'-2"  | 16'-10"                    | 14'-1"  | 7'-8"   | 2,205           | 20      | 12.5 | 37  | 16 / 2500               |
| 1838 SDFL | 11'-3"                    | 17'-5"  | 17'-2"                     | 15'-11" | 7'-8"   | 2,105           | 20      | 12.5 | 37  | N/A                     |
| 1840 SD   | 13'-1"                    | 17'-8"  | 19'-7"                     | 15'-8"  | 7'-8"   | 2,380           | 20      | 12.5 | 37  | 16 / 2500               |
| 1843 SDFL | 11'-8"                    | 19'-3"  | 19'-9"                     | 17'-8"  | 7'-8"   | 2,250           | 20      | 12.5 | 37  | N/A                     |
| 1845 SD   | 13'-2"                    | 19'-6"  | 22'-1"                     | 17'-11" | 7'-8"   | 2,545           | 20      | 12.5 | 37  | 16 / 2500               |
| 1848 SDFL | 13'-0"                    | 21'-8"  | 22'-2"                     | 20'-5"  | 7'-8"   | 2,380           | 30      | 12.5 | 37  | N/A                     |
| 1850 SD   | 13'-4"                    | 21'-4"  | 24'-7"                     | 20'-0"  | 7'-8"   | 2,695           | 30      | 12.5 | 37  | 16 / 2500               |
| 1855 SD   | 13'-4"                    | 22'-11" | 27'-1"                     | 22'-1"  | 7'-8"   | 2,840           | 35      | 12.5 | 37  | 16 / 2500               |
| 1865 SD   | 11'-7"                    | 32'-5"  | 32'-2"                     | 28'-5"  | 11'-3"  | 4,430           | 35      | 20   | 37  | N/A                     |
| 1875 SD   | 12'-7"                    | 40'-4"  | 37'-2"                     | 34'-8"  | 11'-3"  | 4,715           | 40      | 20   | 37  | N/A                     |
| 1885 SD   | 14'-1"                    | 44'-5"  | 42'-2"                     | 38'-6"  | *11'-6" | 5,970           | 45      | 25   | 37  | N/A                     |
| 1890 SD   | 14'-10"                   | 40'-6"  | 44'-8"                     | 42'-0"  | *11'-6" | 6,080           | 60      | 26   | 37  | N/A                     |
| 18100 SD  | 14'-4"                    | 51'-6"  | 49'-8"                     | 43'-5"  | *11'-6" | 7,350           | 50      | 30   | 37  | N/A                     |
| 18105 SD  | 15'-0"                    | 56'-6"  | 52'-2"                     | 47'-5"  | *11'-6" | 7,455           | 55      | 30   | 37  | N/A                     |

### 22 Series Conveyors

| Model     | <sup>1</sup> Low Position |         | <sup>2</sup> High Position |         | Width   | Weight<br>(lbs) | HP Req. |      |     | HYD Req.<br>(GPM / PSI) |
|-----------|---------------------------|---------|----------------------------|---------|---------|-----------------|---------|------|-----|-------------------------|
|           | B                         | C       | A                          | C       |         |                 | PTO     | ELEC | GAS |                         |
| 2215 TR   | 4'-2"                     | 7'-2"   | 4'-8"                      | 7'-2"   | 3'-6"   | 1,130           | N/A     | 7.5  | 9.0 | 16 / 2500               |
| 2230 TD   | 11'-7"                    | 12'-5"  | 14'-7"                     | 11'-10" | 7'-8"   | 1,850           | N/A     | 12.5 | N/A | 16 / 2500               |
| 2235 TD   | 12'-10"                   | 14'-4"  | 16'-10"                    | 13'-3"  | 7'-8"   | 2,020           | N/A     | 12.5 | N/A | 16 / 2500               |
| 2238 TDFL | 11'-3"                    | 17'-5"  | 17'-2"                     | 15'-11" | 7'-8"   | 2,315           | N/A     | 12.5 | N/A | 16 / 2500               |
| 2240 TD   | 12'-5"                    | 16'-10" | 19'-7"                     | 14'-10" | 7'-8"   | 2,210           | N/A     | 15   | N/A | 16 / 2500               |
| 2243 TDFL | 11'-8"                    | 19'-3"  | 19'-9"                     | 17'-8"  | 7'-8"   | 2,475           | N/A     | 20   | N/A | 16 / 2500               |
| 2245 TD   | 12'-0"                    | 19'-0"  | 22'-1"                     | 17'-1"  | 7'-8"   | 2,395           | N/A     | 15   | N/A | 16 / 2500               |
| 2248 TDFL | 13'-0"                    | 21'-8"  | 22'-2"                     | 20'-5"  | 7'-8"   | 2,620           | N/A     | 20   | N/A | 16 / 2500               |
| 2250 TD   | 12'-10"                   | 20'-6"  | 24'-7"                     | 19'-2"  | 7'-8"   | 2,550           | N/A     | 20   | N/A | 16 / 2500               |
| 2235 SD   | 12'-8"                    | 15'-2"  | 16'-10"                    | 14'-1"  | 7'-8"   | 2,425           | N/A     | 12.5 | 37  | 16 / 2500               |
| 2238 SDFL | 11'-3"                    | 17'-5"  | 17'-2"                     | 15'-11" | 7'-8"   | 2,315           | 20      | 12.5 | 37  | N/A                     |
| 2240 SD   | 13'-1"                    | 17'-8"  | 19'-7"                     | 15'-8"  | 7'-8"   | 2,620           | N/A     | 15   | 37  | 16 / 2500               |
| 2243 SDFL | 11'-8"                    | 19'-3"  | 19'-9"                     | 17'-8"  | 7'-8"   | 2,475           | 25      | 20   | 37  | N/A                     |
| 2245 SD   | 13'-2"                    | 19'-6"  | 22'-1"                     | 17'-11" | 7'-8"   | 2,800           | N/A     | 15   | 37  | 16 / 2500               |
| 2248 SDFL | 13'-0"                    | 21'-8"  | 22'-2"                     | 20'-5"  | 7'-8"   | 2,620           | 30      | 20   | 37  | N/A                     |
| 2250 SD   | 13'-4"                    | 21'-4"  | 24'-7"                     | 20'-0"  | 7'-8"   | 2,965           | N/A     | 20   | N/A | 16 / 2500               |
| 2255 SD   | 13'-4"                    | 22'-11" | 27'-1"                     | 22'-1"  | 7'-8"   | 3,125           | N/A     | 20   | N/A | 16 / 2500               |
| 2265 SD   | 11'-7"                    | 32'-5"  | 32'-2"                     | 28'-5"  | 11'-3"  | 4,873           | 60      | 30   | N/A | N/A                     |
| 2275 SD   | 12'-7"                    | 40'-4"  | 37'-2"                     | 34'-8"  | *11'-3" | 5,190           | 60      | 30   | N/A | N/A                     |
| 2285 SD   | 14'-1"                    | 44'-5"  | 42'-2"                     | 38'-6"  | *11'-6" | 5,970           | 70      | 40   | N/A | N/A                     |
| 2290 SD   | 14'-10"                   | 40'-6"  | 44'-8"                     | 42'-0"  | *11'-6" | 6,080           | 80      | 40   | N/A | N/A                     |
| 22100 SD  | 14'-4"                    | 51'-6"  | 49'-8"                     | 43'-5"  | *11'-6" | 7,350           | 80      | 40   | N/A | N/A                     |
| 22105 SD  | 15'-0"                    | 56'-6"  | 52'-2"                     | 47'-5"  | *11'-6" | 7,455           | 80      | 40   | N/A | N/A                     |
| 22110 SD  | 17'-0"                    | 59'-4"  | 54'-10"                    | 42'-9"  | *11'-6" | 9,730           | 100     | 50   | N/A | N/A                     |
| 22120 SD  | 17'-6"                    | 62'-2"  | 59'-10"                    | 50'-10" | *11'-6" | 10,550          | 100     | 50   | N/A | N/A                     |
| 22125 SD  | 17'-6"                    | 66'-1"  | 62'-4"                     | 54'-10" | *11'-6" | 10,850          | 100     | 50   | N/A | N/A                     |

### 26 Series Conveyors

| Model    | <sup>1</sup> Low Position |         | <sup>2</sup> High Position |         | Width   | Weight<br>(lbs) | HP Req. |      |     | HYD Req.<br>(GPM / PSI) |
|----------|---------------------------|---------|----------------------------|---------|---------|-----------------|---------|------|-----|-------------------------|
|          | B                         | C       | A                          | C       |         |                 | PTO     | ELEC | GAS |                         |
| 2625 KP  | 5'-4"                     | 7'-3"   | 3'-4"                      | 7'-3"   | 8'-0"   | 3,540           | N/A     | 12.5 | 37  | 16 / 2500               |
| 2665 SD  | 11'-8"                    | 32'-8"  | 32'-1"                     | 28'-8"  | *11'-6" | 5,165           | 60      | 30   | N/A | N/A                     |
| 2675 SD  | 12'-8"                    | 40'-7"  | 37'-1"                     | 34'-11" | *11'-6" | 5,960           | 70      | 30   | N/A | N/A                     |
| 2685 SD  | 14'-2"                    | 44'-9"  | 42'-1"                     | 38'-9"  | *11'-6" | 6,880           | 80      | 30   | N/A | N/A                     |
| 2690 SD  | 14'-11"                   | 49'-8"  | 44'-7"                     | 43'-1"  | *11'-6" | 7,020           | 80      | 40   | N/A | N/A                     |
| 26100 SD | 14'-5"                    | 51'-9"  | 49'-7"                     | 43'-8"  | *11'-6" | 9,750           | 90      | 40   | N/A | N/A                     |
| 26105 SD | 15'-1"                    | 56'-9"  | 52'-1"                     | 47'-8"  | *11'-6" | 10,235          | 90      | 40   | N/A | N/A                     |
| 26110 SD | 16'-3"                    | 60'-3"  | 54'-8"                     | 51'-10" | *11'-6" | 10,890          | 100     | 50   | N/A | N/A                     |
| 26120 SD | 17'-0"                    | 66'-0"  | 59'-8"                     | 56'-5"  | *11'-6" | 11,700          | 120     | 50   | N/A | N/A                     |
| 26125 SD | 17'-1"                    | 68'-11" | 62'-2"                     | 58'-8"  | *11'-6" | 12,090          | 120     | 50   | N/A | N/A                     |



\*Axes extendable to 14'-8"

<sup>1</sup>Low Position is measured from ground to top of discharge spout.

<sup>2</sup>High Position is measured from ground to bottom of discharge spout at a 30° angle

# Neu-Tech Industries

## Aluminum Spring Loaded Grain Auger Hoppers

- Fits Any Make Of Auger – Including Brandt
- Tow Hitch Included – Bolt-On
- 46" Long x 40" Wide
- 14" High When Down
- 27" High When Up
- Weighs 45lbs
- Sizes to Fit 8", 10", 12" and 13" Augers
- Canvas Colors Available in Red or Black
- Canvas Covers are Optional and All Black



# SCAG Zero Turn Mowers



**SLS**



**Liberty Z**



**Freedom Z**



**Patriot**



**TigerCat II**



**Cheetah II**



**Turf Tiger II**



# Hillside Farm Supply

## Grain Equipment Product Catalogue

Email: [hillsidefarmsupply@outlook.com](mailto:hillsidefarmsupply@outlook.com)  
Phone: (204) 312-7833  
[hillsidefarmsupply.com](http://hillsidefarmsupply.com)